

Seating » Benches




Collection: Avenue

Designed by: Botton + Gardiner

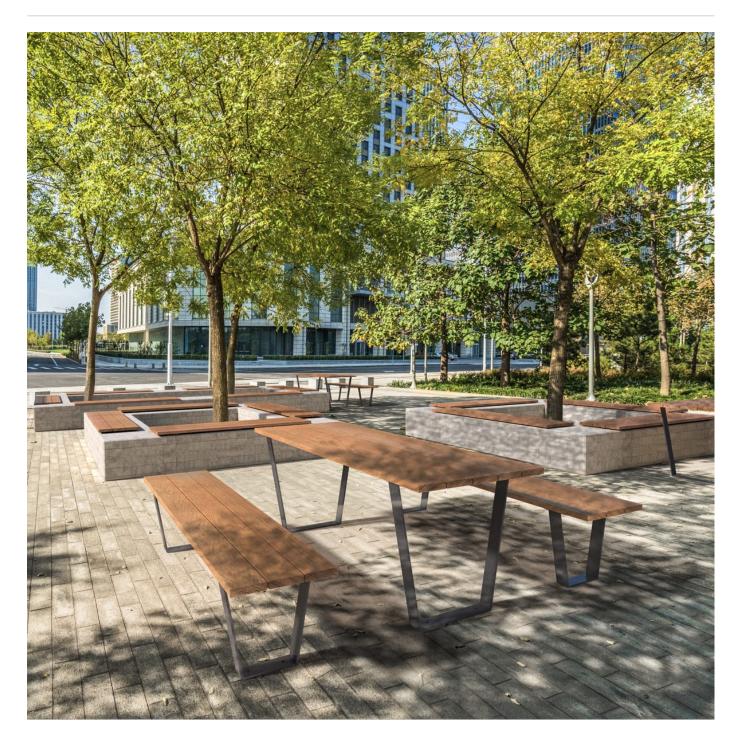

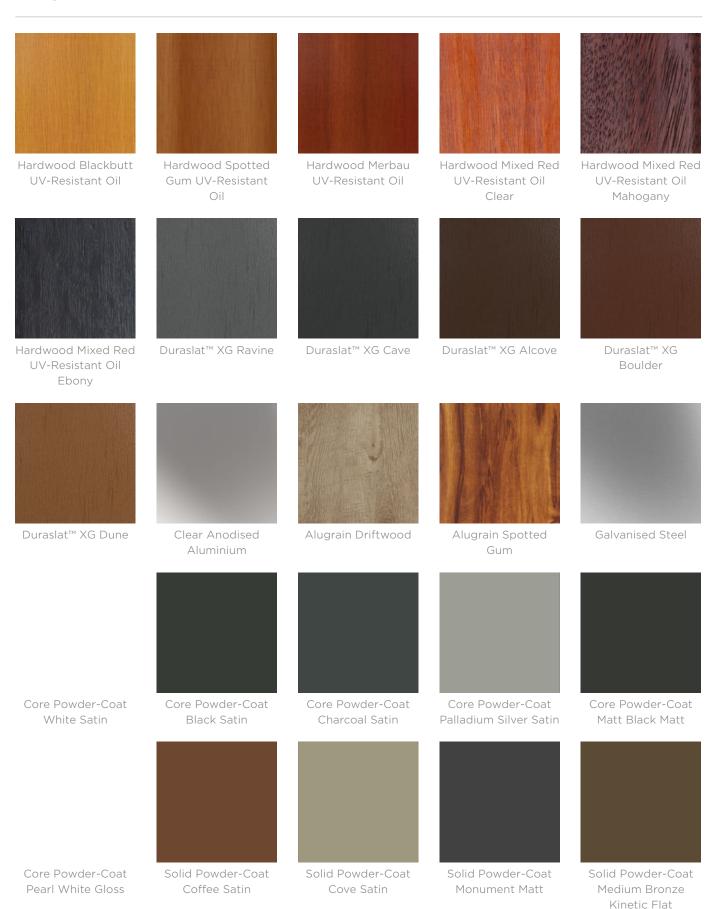

Seating » Benches

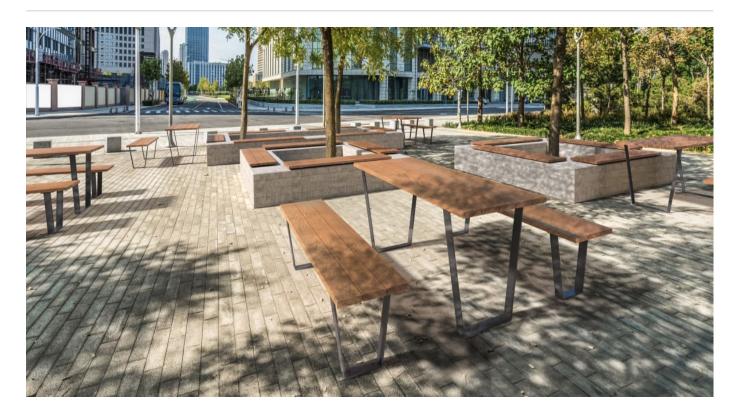

Minimalist bench design. Batten top in hardwood, Duraslat™ XG and aluminium with a tapered steel frame in 27 powder-coat or galvanised finishes.

Description

Rectangular battens and a tapered steel frame combine to deliver a minimalist bench design that takes its cues from 20th century industrial design. The functional feel and light appearance of the Avenue bench complements and sits within most public spaces. Finishes include 5 hardwood, 5 Duraslat™ XG and 3 aluminium batten colours and 27 powder-coat finishes or a galvanised finish.

Dimensions Hardwood

1800mmW x 430mmD x 450mmH

Duraslat™ XG

1600mmW x 430mmD x 450mmH

Aluminium | Alugrain

2000mmW x 430D x 450mmH

Seating » Benches

Batten Type

Hardwood

Blackbutt, Spotted Gum, Mixed Red -

Clear, Mahogany, Ebony Oil

Duraslat™ XG

Ravine, Cave, Alcove, Boulder, Dune

Aluminium | Alugrain

Clear Anodised, Driftwood, Spotted Gum

Frame

Powder-coated steel or hot-dip galvanised steel.

Optional 316 stainless steel in matt textured frame finish available on request.

Powder Coat

Core

White (satin), Black (satin), Charcoal (satin), Palladium Silver (satin), Matt Black (matt), Pearl White (gloss)

Solid

Coffee (satin), Cove (satin), Monument (matt), Medium Bronze Kinetic (flat)

Textured

Core Ten (textured metallic), Asteroid (textured metallic), Bass (textured metallic), Textura Black (textured), Textura Monument (textured), Textura White (textured)

Signature

Deep Ocean (satin), Wedgewood (satin), Mangrove (satin), Territory Red (matt), Claypot (satin), Paperbark (satin)

Bold

Bondi Blue (gloss), Leaf (satin), Sensation (gloss), Lobster (satin), Moonlight (satin)

Sustainability

Certified Hardwood

All hardwood is sourced from sustainable forests certified by the Program for the Endorsement of Forest Certification (PEFC), the world's largest forestry certification system.

Recycled Materials

We locally source our steel. It means we know it uses recycled content and is 100% recyclable.

Duraslat $^{\text{TM}}$ XG is made from 90% of recycled hardwood fibres and reclaimed plastic materials, which reduces demand for virgin materials.

Low Pollutants

Our powder-coating process doesn't emit Volatile Organic Compounds (VOCs) and has Environmental Product Declarations (EPDs).

Warranty	5-year warranty. View the <u>warranty</u> for more details.
Lead Time	6-8 weeks
Assembly & Delivery	Shipped fully assembled on pallets.
Fixing Detail	Surface or sub-surface fixed by others. Anchors not included. Shims available for sub-surface fixing on request.
How to Specify	Select your length Select your batten finish Select your frame finish Select your fixing type

Seating » Benches

Care Instructions

Hardwood

Cleaning

Remove any loose surface deposits with a soft bristled brush and wipe down with fresh water and a non-abrasive cloth.

Oiling

Oiling of timber will postpone natural greying, repel moisture, improve mould resistance, help maintain a smooth surface texture and enhance the grain and colour.

To maintain, lightly sand rough areas of timber and brush on one coat of timber decking oil every 6 months or as required.

Duraslat™ XG

Cleaning

Simply wash down occasionally. Do not use high pressure cleaners.

Powder-Coat

Cleaning

Carefully remove any loose surface deposits with a wet sponge or soft bristled brush.

Use a soft (non-abrasive) cloth or brush and a diluted solution of mild detergent and warm water.

Ensure surfaces are thoroughly rinsed with clean fresh water after cleaning to remove all residues.

Never use thinners, abrasive cleaning agents, alcohol-based, acid or alkali cleaning agents.

Hot-Dip Galvanised Steel

For general cleaning of bulk contaminants such as dirt and the like, ordinary laundry soaps can be satisfactorily used.

For more stubborn or larger areas, the use of a low-pressure wash (eg. a gurney gun) with just pure water or in conjunction with proprietary cleaning materials, such as car wash or truck wash, can be effective. It is important that the steel be washed down with fresh water after cleaning.

The cleaning treatment of the galvanising should be conservative at first and then if the situation demands, the treatment can become steadily more aggressive. Also, wherever some form of mechanical abrasion or "scrubbing" is required, the use of a hard, plastic bristle brush is recommended. Steel bristle brushes are not to be used since they will cause discolouration.

Mechanical methods of cleaning zinc surfaces can cause aesthetic issues. The "cleaned" areas are likely to contrast with adjacent untreated surfaces and may take a significant period of time to weather to a uniform colour. If aesthetics is a large concern, it is advisable to first test the cleaning method in an inconspicuous area in case the aesthetic effect is unappealing.

Customisable	As this item is made to order locally, custom lengths are available on request.
Additional Comments	Hardwood is treated with a UV-resistant oil finish. As this item is made to order locally, custom lengths are available on request.